


CAUTION – RISK OF SHOCK –

Disconnect Power at the main circuit breaker panel or main fuse box before starting and during the installation.

- 1) Slip fixture over post and mark position of mounting holes in post.
- 2) Remove fixture from post.
- 3) Drill 3/16" diameter holes in post at positions marked.
- 4) If fixture is provided with ground wire, connect fixture ground wire to outlet box ground wire with wire connector. (Not provided). NEVER connect ground wire to black or white power supply wires.
- 5) Make wire connections. Connectors not provided. Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor


*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)



- 6) Slip fixture over post and secure in place using provided screws. Screws should slip into holes drilled in post.
- 7) Insert recommended bulb.
- 8) Lower glass down over socket. Fit bottom of glass on fixture base.
- 9) Lower cage down over glass and set cage on fixture base.
- 10) Thread screws up from underside of fixture base and into cage. Tighten screws to secure cage to base.

INSTRUCTIONS

For Assembling and Installing Fixtures in Canada
Pour L'assemblage et L'installation Au Canada

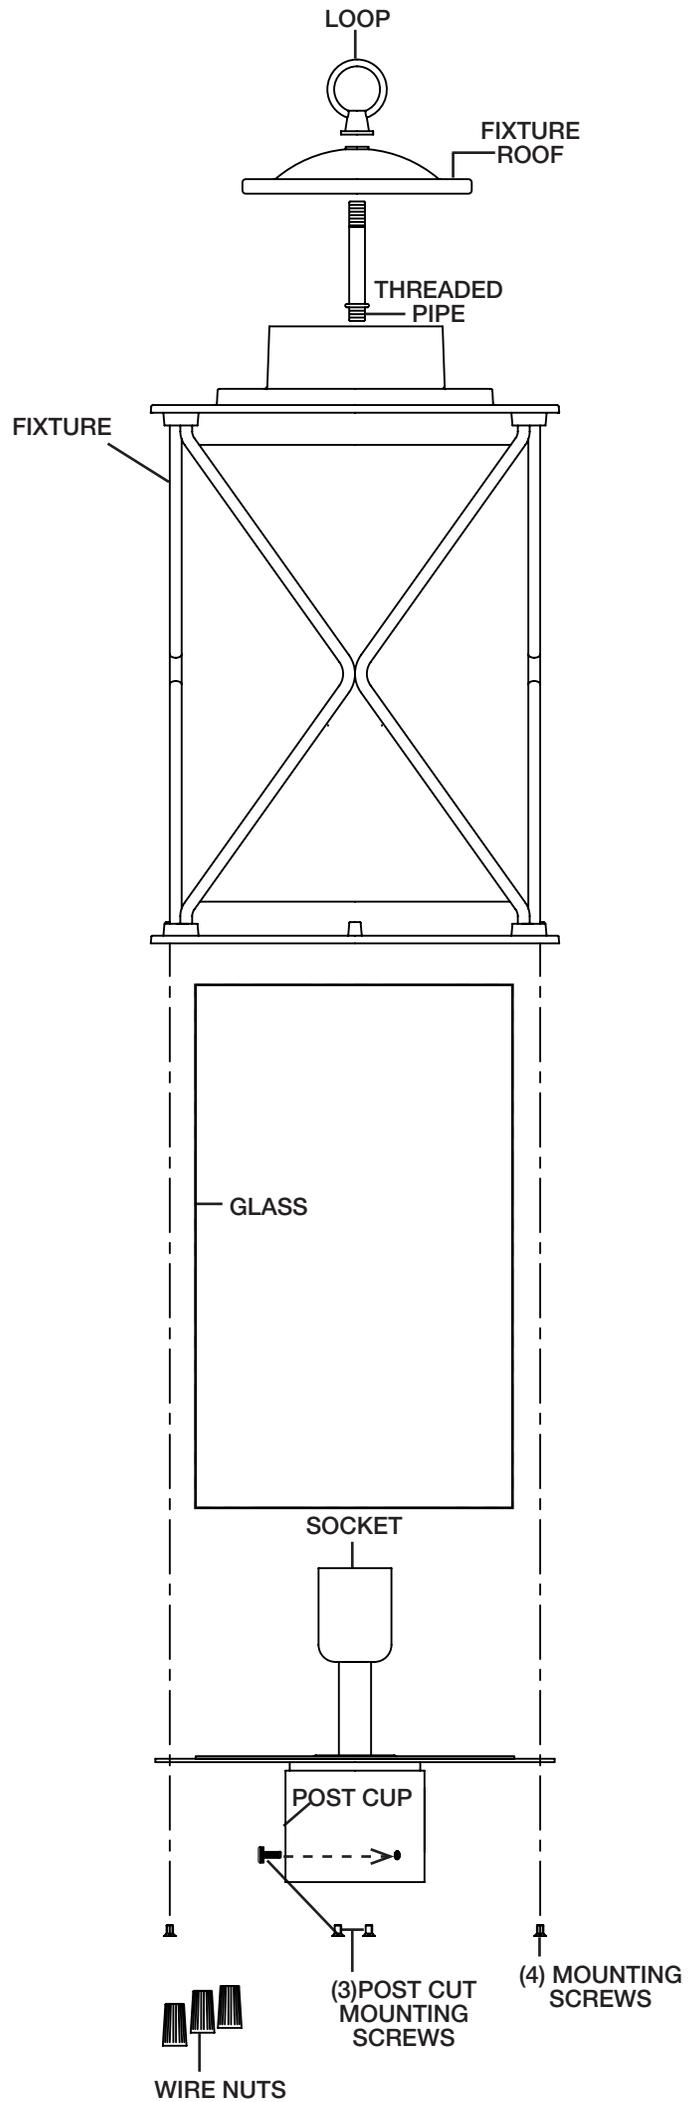


ATTENTION – RISQUE DE DÉCHARGES ÉLECTRIQUES –
Couper le courant au niveau du panneau du disjoncteur du circuit principal ou de la boîte à fusibles principale avant de procéder à l'installation.

- 1) Passer le luminaire par dessus le support et marquer un repère pour les trous de montage sur le support.
- 2) Enlever le luminaire du support.
- 3) Percer des trous de 1/8 po sur chacun des repères du support.
- 4) Si luminaire est fourni avec un I de mise à la terre, le connecter à la boîte de sortie de courant de mise à la terre avec un serre-fils. Non fourni. Ne jamais connecter un I de mise à la terre aux fils d'alimentation noir ou blanc.
- 5) Connecter les fils (connecteurs non fournis). Se porter au tableau ci-dessous pour faire les connexions.

Connecter le fil noir ou rouge de la boîte	Connecter le fil blanc de la boîte
A Noir	A Blanc
*Au cordon parallèle (rond et lisse)	*Au cordon parallèle (à angles droits et strié)
Au transparent, doré, marron, ou noir sans fil distinctif	Au transparent, doré, marron, ou noir avec un fil distinctif
Fil isolé (sauf fil vert) avec conducteur en cuivre	Fil isolé (sauf fil vert) avec conducteur en argent

*Remarque: Avec emploi d'un fil parallèle (SPT I et SPT II). Le fil neutre est à angles droits ou strié et l'autre fil doit être rond ou lisse (Voir le schéma).



- 6) Faire glisser le luminaire sur le support et serrer à l'aide des vis. Les vis doivent s'ajuster correctement dans les trous du support.
- 7) Insérez l'ampoule recommandée.
- 8) Abaisser le verre sur la douille. Placer la partie inférieure du verre sur la base du luminaire.
- 9) Abaisser la cage sur le verre et placer la cage sur la base du luminaire.
- 10) Serrer les vis du dessous de la base du luminaire et dans la cage. Serrer les vis pour serrer la cage sur la base.

