

LED Cloud LCL Series

Features

This clean appearance, surface mounted cloud provides a wide distribution of light with a white diffuser. It can be used in various applications including offices, corridors, garages, kitchens and public spaces. Fixture mounts to standard junction box (not included).

Construction

Housing is die-formed of 22-gauge steel. Standard mounting holes are included. Power supply connections can be made inside the fixture wire way or in a junction box (not included).

Finish

Housing is finished in lighting grade white baked gloss enamel paint.

Diffuser

White acrylic diffuser.

Electrical

Input 120 VAC / 60HZ.
Compatible with TRIAC and ELV dimmers.

Lamping

Integrated LED modules capable of producing: 36W = 3000 source lumens 52W = 4100 source lumens 60W = 5000 source lumens Adjustable Choice 3000K or 4000K (CCT). Rated for 50,000 Hrs. 90 CRI.


Certification

All fixtures are cETLus listed for indoor damp locations. Title 24/JA8 Compliant*.

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

Specifications and dimensions subject to change without notice.












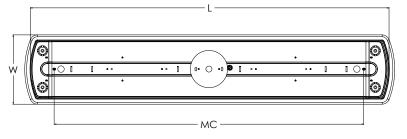



Ordering Information:

LCL3000LAJD1 36W 3000 3000K/4000K 49-3/4" 9-3/8" 3-1/4" 41-1/2 LCL4100LAJD1 52W 4100 3000K/4000K 49-3/4" 9-3/8" 3-1/4" 41-1/2	White			Adjustable CCT		W	D	MC
LCL5000LAJD1* 60W 5000 3000K/4000K 49-3/4" 9-3/8" 3-1/4" 41-1/2		52W	4100	3000K/4000K	49-3/4"	9-3/8"	3-1/4"	41-1/2"