



Ideal LED Sconce IDS Series

Features

Simple modern curved white glass one light wall mount sconce. Open top for wall wash effect. Die-cast aluminum satin nickel trim. Fixture mounts to standard junction box (not included) on a wall.

Construction

Back plate is die-formed of 22-gauge steel. Power supply connections must be made inside a junction box (not included).

Finish

Available in satin nickel.

Diffuser

Bow formed matte white glass.

Electrical

Input 120-277 VAC/ 60 Hz LED.
Not compatible with dimmers.

LED

Integrated LED modules capable of producing:
15W = 1300 lumens
4000K (CCT) rated for 50,000 hrs., 80 CRI.

Certification


cETLus listed for indoor damp locations.
ADA

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.

Specifications and dimensions
subject to change without notice.

| | | |
|----------------|--|--------------|
| LOCATION | | DATE |
| PREPARED BY | | QUANTITY |
| COMMENTS | | FIXTURE TYPE |
| CATALOG NUMBER | | |

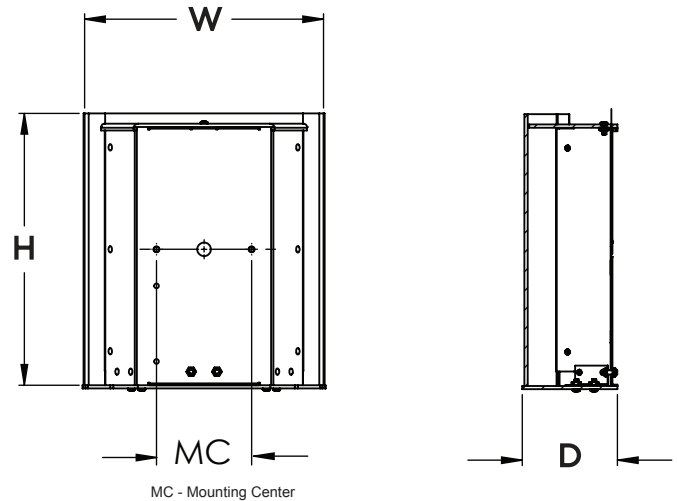

Ordering Information:

| Satin Nickel | LED | Source Lumens | CCT | H | W | D | MC |
|------------------|-----|---------------|-------|-----|--------|--------|--------|
| IDS09101600L41SN | 15W | 1300 | 4000K | 10" | 8-3/4" | 3-1/2" | 3-1/2" |