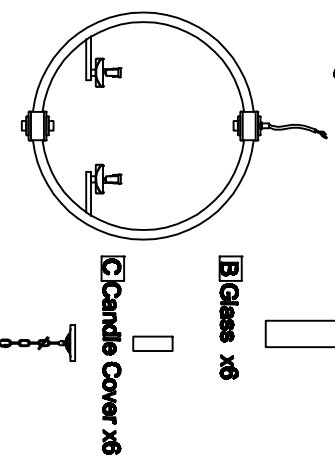
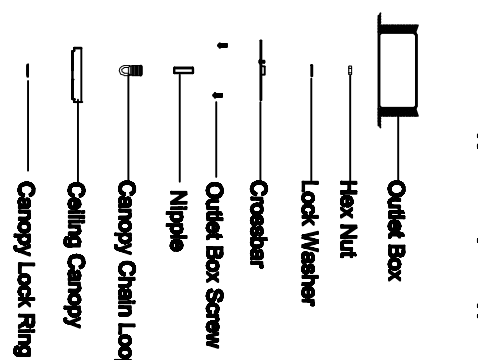
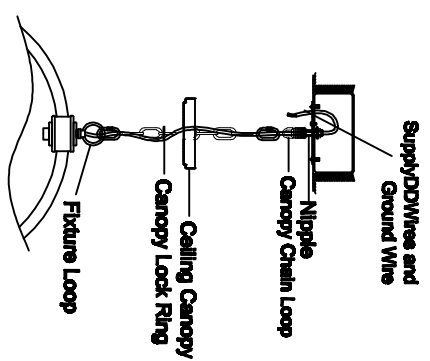
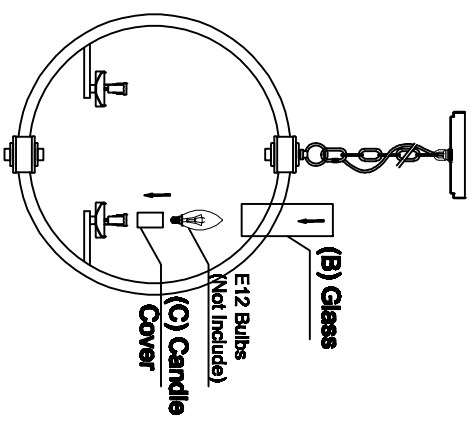


Assembly Instruction Sheet #IS-9951P19-6 For Style 9951P19-6

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.
Light Source: (2) E12 Candlelike Base Bulbs 60W (Manufactured Include)
Estimated Assembly Time: 10-20minutes
Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.


Warnings and Cautions
 Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt. These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation. Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

<p>Package Contents</p>  <p>A Fixture Body x1 D Ceiling Canopy x1</p> <p>B Glass x6</p> <p>C Candle Cover x6</p> <p>Hardware Contents</p> <table border="1"> <thead> <tr> <th>PART</th> <th>DESCRIPTION</th> <th>QUANTITY</th> </tr> </thead> <tbody> <tr> <td>BB</td> <td>Wire nut</td> <td>2pcs</td> </tr> <tr> <td>EE</td> <td>Outlet Box Screw</td> <td>2pcs</td> </tr> <tr> <td>BB</td> <td></td> <td></td> </tr> <tr> <td>EE</td> <td></td> <td></td> </tr> </tbody> </table>	PART	DESCRIPTION	QUANTITY	BB	Wire nut	2pcs	EE	Outlet Box Screw	2pcs	BB			EE			<p>STEP 1 - Install the Canopy Chain Loop and Nipple</p>  <p>Outlet Box</p> <p>Hex Nut</p> <p>Lock Washer</p> <p>Crossbar</p> <p>Outlet Box Screw</p> <p>Nipple</p> <p>Canopy Chain Loop</p> <p>Ceiling Canopy</p> <p>Canopy Lock Ring</p> <p>Figure 1</p>
PART	DESCRIPTION	QUANTITY														
BB	Wire nut	2pcs														
EE	Outlet Box Screw	2pcs														
BB																
EE																

<p>STEP 2 - Install the Fixture Chain and Ceiling Canopy</p>  <p>Supply/DN Wire and Ground Wire</p> <p>Nipple</p> <p>Canopy Chain Loop</p> <p>Ceiling Canopy</p> <p>Canopy Lock Ring</p> <p>Fixture Loop</p> <p>Figure 2</p>	<p>STEP 4 - Install Glass and Bulbs.</p>  <p>(B) Glass</p> <p>E12 Bulbs (Not Include)</p> <p>(C) Candle Cover</p> <p>Figure 4</p>
--	---

STEP 3 - Wire Connections

A. Use standard wire connectors (not included) to make all wire connections. Twist connectors and wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

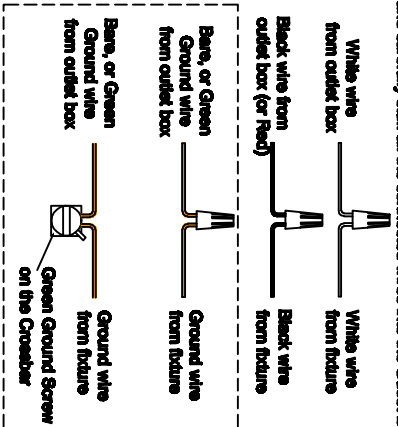

White wire from outlet box

White wire from fixture

Black wire from outlet box (or Red)

Black wire from fixture

Bare, or Green Ground wire from outlet box

Bare, or Green Ground wire from fixture

Bare, or Green Ground wire from outlet box

Ground wire from fixture

Green Ground Screw on the Crossbar

Figure 3