7822 INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions as you may need them a later date.

CAUTION

WARNING: Risk of Fire. Consult a qualified electrician to ensure correct branch circuit conductor.

Turn off the main power at the circuit breaker before installing the fixture in order to prevent possible shock.

GENERAL


All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustration.

ASSEMBLY AND INSTALLATION

- 1. Remove 3 screws (6) from the bottom of fixture body, save 3 screws (6) for later use.
- 2. Pull out the outlet wire and ground wire (6) from the floor base (1) (floor base not included). Make wire connections with wire nut (8).
- --Ribbed wire (w/o marking) or white wire from light to White wire (2) from floor base.
- --Smooth wire (w marking) or black wire from light to Black wire (3) from floor base.
- --Connect the ground wire (4) from the fixture to the ground supply wire from the floor base.
- 3. Screw the loop (7) to the top of the fixture.
- 4. Open the lamp door then install lamp cap (8) and the bulbs: (bulbs not included), finally close the lamp door.

(Don't exceed the maximum capacity recommended on the sockets).

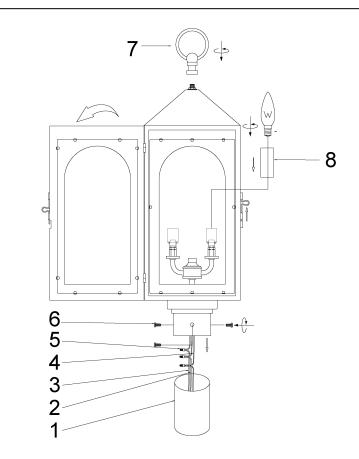

- 1. FLOOR BASE
- 2. WHITE WIRE
- 3. BLACK WIRE
- 4. GROUND WIRE
- 5. WIRE NUT
- 6. SCREW
- 7. LOOP
- 8. LAMPHOLDER CAP

INSTALLATION IS NOW COMPLETED