
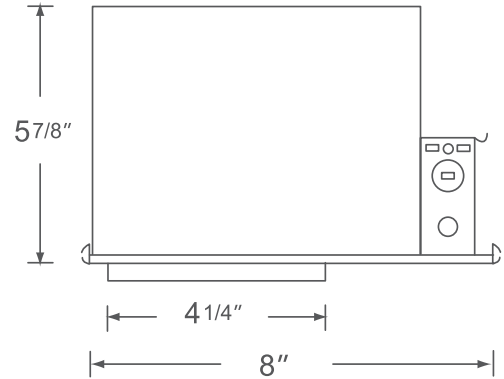


# 8202HA Series

120V-60Hz

Catalog #:		Type
Project:		Date
Prepared by:		

## 4" IC Airtight Frame-In

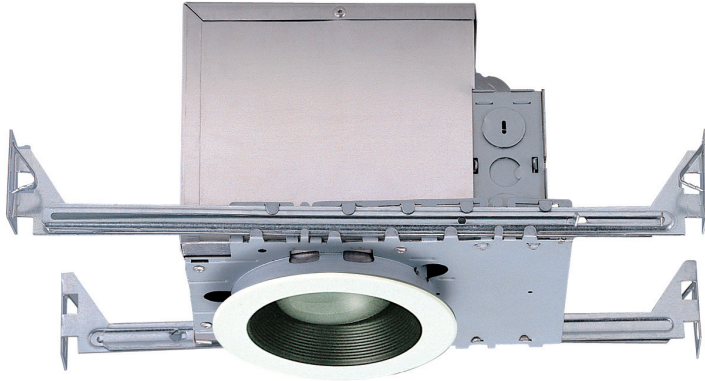

4" IC Airtight Frame-In

### DESCRIPTION

This 8202HA Series airtight aluminum housing is insulation contact rated. The housing is suitable for new construction in both residential and commercial applications. Features thermal protector guards, adjustable hangar bars for easy installation.

### DESIGN FEATURES

#### Electrical

- 120V-60Hz
- Incandescent, 50W Max (35W with cellulose type insulation)
- LED Trims Available

#### Housing

- Sturdy aluminum construction
- IC Rated for direct contact with batt type fiberglass insulation
- Thermally protected against improper lamping
- Adjusts to accommodate up to 1" ceiling thickness
- 5-7/8" height allows use in 2" x 6" joist construction
- Adjustable socket bracket plate for proper positioning of different lamp types
- cCSAus listed for damp location and feed through wiring

#### Junction Box

- J-box is listed for through-branch circuit wiring, (4in-4out) and seven 1/2" knockouts
- 3-port quick connectors pre-installed in all J-boxes

#### Bar Hanger

- Pre-installed bar hangers allow the housing to be positioned at any point within 24" joist span
- Pre-installed captive nails on bar hangers
- Bar hangers can be turned 90° on the plaster frame
- Bar hangers are designed to fit T-bar spine without additional clamps for use in drop ceilings

#### Dimensions

- H 5-7/8" x L 8" x W 5-3/4"
- Aperture: 4-1/4"

#### Certifications

- cCSAus certified for damp location
- 1 year limited warranty

#### Lamp

- R20
- PAR20



TEL: 800.937.6925 | Fax: 800.207.9509 | [www.rplighting.com](http://www.rplighting.com)

Specifications and dimensions subject to change without notice.

8/31/2020 R2


# 8202HA Series

120V-60Hz

## Specification & Ordering

### HOUSING


Example: 8202HA

Housing #	Wattage	
 8202HA		
8202HA	50 Max (trim Permitting)	:

### LED Trims

### ORDERING GUIDE

Example: 8756WH-90-3K-R

Model #	Finish	CRI	CCT	Retrofit
 8756		-90	-3K	-R
8756 LED Retrofit Disk	<b>WH</b> : White <b>BK</b> : Black <b>OB</b> : Oil Rubbed Bronze	-90 : 90 CRI	-3K : 3000K	-R : Retrofit Trim

### ORDERING GUIDE

Example: 8763WH-90-3K

Model #	Finish	CRI	CCT
 8763		-90	
8763 4" Recessed LED Module Reflector 90 CRI   120V O.D. 5"	<b>BN</b> : Brushed Nickel <b>BK</b> : Black <b>OB</b> : Oil Rubbed Bronze <b>CL</b> : Clear <b>WH</b> : White	-90 : 90CRI, 10W, 600lms	<b>-3K</b> : 3000K <b>-4K</b> : 4000K

### ORDERING GUIDE

Example: 8761BN-90-3K

Model #	Finish	CRI	CCT
 8761		-90	-3K
8761 LED Retrofit Square Baffle	<b>BN</b> : Brushed Nickel <b>OB</b> : Oil Rubbed Bronze	-90 : 90 CRI, 700 lms	-3K : 3000K

### ORDERING GUIDE

Example: 8765OB

Model #	Finish
 8765	
8765 LED Retrofit Eyeball	<b>BN</b> : Brushed Nickel <b>OB</b> : Oil Rubbed Bronze <b>WH</b> : White

TEL: 800.937.6925 | Fax: 800.207.9509 | [www.rplighting.com](http://www.rplighting.com)

Specifications and dimensions subject to change without notice.

8/31/2020 R2

# 8202HA Series

120V-60Hz

## Specification & Ordering

### ORDERING GUIDE

Example: 8768OB

Model #	Finish
	<b>8768</b>
	<b>8768</b> LED Retrofit Eyeball
	<b>BN</b> : Brushed Nickel <b>OB</b> : Oil Rubbed Bronze <b>WH</b> : White

### ORDERING GUIDE

Example: 8722WH-90-3K

Model #	Finish	CRI	CCT
	<b>8722</b>	<b>WH</b>	<b>-90</b>
	<b>8722</b> 4" LED Module/ Retrofit Trim 120V, O.D. 5-1/6"	<b>WH</b> : White	<b>-90</b> : 90 CRI, 650 lms

### ORDERING GUIDE

Example: 8767OB

Model #	Finish
	<b>8767</b>
	<b>8767</b> LED Retrofit Gimbal
	<b>OB</b> : Oil Rubbed Bronze

### ORDERING GUIDE


Example: 8769WH-90-3K

Model #	Finish	CRI	CCT
	<b>8769</b>		<b>-3K</b>
	<b>8769</b> 4" Recessed LED Module Baffle 120V, O.D. 5"	<b>BA</b> : Brushed Aluminum <b>BK</b> : Black <sup>1</sup> <b>OB</b> : Oil Rubbed Bronze <sup>1</sup> <b>WH</b> : White	<b>-3K</b> : 3000K
		<b>-80</b> : 80 CRI, 889 lms <b>-90</b> : 90 CRI, 710 lms	

1 - Only available in -80 CRI

### ORDERING GUIDE

Example: 8770CL-90-3K

Model #	Finish	CRI	CCT
	<b>8770</b>	<b>CL</b>	<b>-3K</b>
	<b>8770</b> 4" Recessed LED Module Clear/ white trim ring 120V, O.D. 5"	<b>CL</b> : Clear	<b>-3K</b> : 3000K
		<b>-80</b> : 81CRI, 889lms <b>-90</b> : 90CRI, 710lms	

TEL: 800.937.6925 | Fax: 800.207.9509 | [www.rplighting.com](http://www.rplighting.com)

Specifications and dimensions subject to change without notice.

8/31/2020 R2

# 8202HA Series

120V-60Hz

## Specification & Ordering

### LED Trims

#### ORDERING GUIDE

Example: 8771WH-90-3K

Model #	Finish	CRI	CCT
	<b>8771</b>		
	<b>8771</b> 4" Recessed LED Gimbal Module 120V, O.D. 5"	<b>BN</b> : Brushed Nickel <sup>1</sup> <b>OB</b> : Oil Rubbed Bronze <sup>1</sup> <b>WH</b> : White	<b>-80</b> : 80 CRI, 895 lms <b>-90</b> : 90 CRI, 717 lms <b>-3K</b> : 3000K <b>-4K</b> : 4000K

1 - Only available in -90-3K

#### ORDERING GUIDE


Example: 8773WH-90-3K

Model #	Finish	CRI	CCT
	<b>8773</b>	<b>WH</b>	<b>-90</b>
	<b>8773</b> LED Recessed Square Retrofit-Kit 120V, O.D. 5-1/8"	<b>WH</b> : White	<b>-90</b> : 90 CRI, 700 lms <b>-3K</b> : 3000K <b>-4K</b> : 4000K

### Incandescent Trims


#### ORDERING GUIDE

Example: 8701WH

Model #	Finish
	<b>8701</b>
	<b>8701</b> White Baffle 50W Max. PAR20/R20


#### ORDERING GUIDE

Example: 8702FS

Model #	Finish
	<b>8702</b>
	<b>8702</b> Fresnel Shower Trim 35W Max. PAR20/R20

#### ORDERING GUIDE

Example: 8703BA

Model #	Finish
	<b>8703</b>
	<b>8703</b> Specular Reflector 50W Max. PAR20/R20

#### ORDERING GUIDE

Example: 8705AL

Model #	Finish
	<b>8705</b>
	<b>8705</b> Albalite Shower Trim 35W Max. PAR20/R20

TEL: 800.937.6925 | Fax: 800.207.9509 | [www.rplighting.com](http://www.rplighting.com)

Specifications and dimensions subject to change without notice.

8/31/2020 R2