


4313-30, 4314-30 & 4318-30

120V

LED Ceiling Mount Fixture

Catalog #:		Type
Project:		Date
Prepared by:		

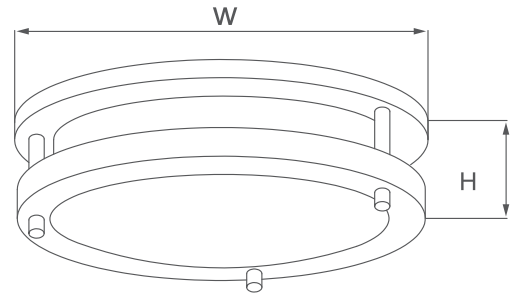

DESCRIPTION

This sleek LED Surface Mount Fixture is an energy efficient LED light that comes complete with an integrated LED light engine - no additional light bulbs needed. This fixture is mounted on a ceiling to provide light anywhere you need it.

DESIGN FEATURES

Construction

- Durable steel construction

Electrical

- 120V
- 10-100% Triac dimmable
- 50,000 hour projected life
- Available in 3000K
- 4313-30: 15W | 1050lms
- 4314-30: 20W | 1400lms
- 4318-30: 28W | 2000lms

Built-in Emergency Backup

- 4313-30-EM

Lens

- Acrylic lens protects LEDs and diffuses glare while allowing for optimum lumen output

Finish

- Available finishes: brushed nickel (BN), oil rubbed bronze (OB), white (WH)

Dimensions

- 4313-30: 12" x 3-1/2"
- 4314-30: 14" x 3-1/2"
- 4318-30: 18" x 4-1/8"

Certifications

- ETL & cETL listed for damp location
- Energy Star listed
- 5 year limited warranty



TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.

4313-30, 4314-30 & 4318-30

120V

Specification & Ordering

Model No.	Size (W x H)	Finish	Watts	CRI	Lumens	Efficacy (lm/W)	Power Factor	Beam Angle
4313-30	12" x 3-1/2"	BN OB WH	15	>85	1050	70	0.99	118°
4314-30	14" x 3-1/2"	BN OB WH	20	>81	1400	70	0.98	116°
4318-30	18" x 4-1/8"	BN OB WH	28	>81	2000	71.4	0.97	116°

ORDERING

Example: 4313-30-BN-3K

Model #	Finish	CCT	Emergency
		-3K	
4313-30 4314-30 4318-30	BN : Brushed Nickel OB : Oil-rubbed Bronze WH : White	-3K : 3000K	-EM : Adds battery pack

*Built-in EM available only on 4313-30